


EXPRESS COUPLINGS


Express coupling male threaded



	A(mm)	B(mm)	C(mm)	Ø
	57	40	14	1/4"
	57	40	19	3/8"
	57	41	24	1/2"
	57	41	31	3/4"
	57	44	34	1"
	57	46	44	1.1/4"


Express coupling female threaded



	A(mm)	B(mm)	C(mm)	Ø
	57	32	17	1/4"
	57	32	21	3/8"
	57	32	26	1/2"
	57	35	33	3/4"
	57	38	38	1"
	57	43	46	1.1/4"


Express hose shank

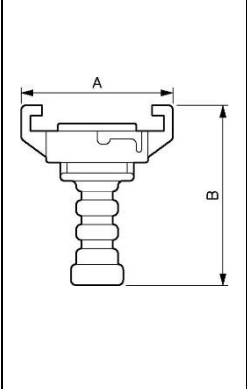

	A(mm)	B(mm)	Per tubo flessibile Ø int. (mm)
	57	69	7
	57	69	8
	57	69	9
	57	69	10
	57	69	11
	57	69	13
	57	69	16
	57	69	19
	57	69	22
57	69	25	

Cap



	A(mm)	B(mm)
	57	30

Technical requirements:

Max. operating pressure: 10 bar

Temperature: -5°C ÷ +60°C